

Resetting the selector valve

In some cases where the valve has been assembled in the factory the settings can be slightly off. To reset the valve please follow the instructions below.

IMPORTANT! You do not need to move any pipework around at the back of the unit!

Note: Some models may vary ever so slightly, but in all cases the adjustment is the same.




1. turn the knob on the selector anticlockwise to unscrew it.




2. Locate the nut behind



3. Remove the nut by turning anticlockwise.

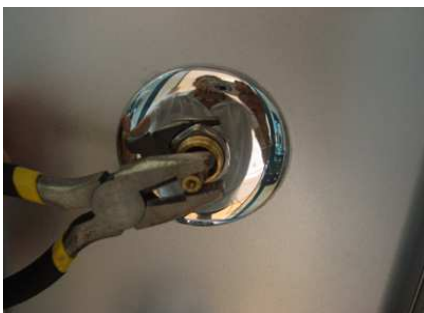

4. Using a set of pliers, turn the brass lever until you have water coming out of the top rain shower. Now align the rear plate to match the rain shower setting. This setting is the easiest as it sets to around the 12 o'clock position. Now tighten up the nut

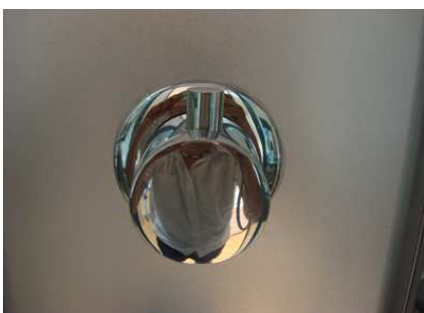

5. Push the selector cap back over the valve, remembering to keep the selector knob pointing to the rain shower setting and tighten it up. Now your setting should be correct. If not repeat until correct.